



TRUCK PLOW PRODUCT GUIDE: 2026-2027

BEST SERVED COLD



SNOWPLOWS

HARDWORKING PLOWS FOR HARDWORKING PEOPLE.

IS YOUR FLEET



V-PLOWS

Push, stack, or windrow snow with the same truck and plow.



WING PLOWS

Wing operation lets the operator increase efficiency with every push.

STORM READY?



STRAIGHT BLADE PLOWS

Simple operation for
windrowing snow.

REASONS TO BELIEVE

We're known around the globe for tough products made by tough Mainers. Consider these features standard, no matter what's on the front of your truck.

(A) Chain Lift Design

The FISHER® chain-lift setup stacks higher, scrapes cleaner, and recovers easier than direct-lift designs. When reliability matters most, count on the chain.

FLEET FLEX Electrical System

One wiring system for all modern FISHER plows. Simplifies installs, minimizes vehicle disruption, and keeps operations nimble—any plow, any truck, any time. Dependable and fleet-friendly.

(B) Minute Mount® 2 Plow Attachment

A rugged mechanical hookup built for harsh winters. No sensitive electronics—just smart design that guides your plow in clean and meets safety standards.

Reliable Hydraulics

Fast, smooth, and protected from the elements. Fisher Engineering builds its own hydraulics for total confidence when the storm hits.

(C) SECURITY GUARD™ Anti-Theft System

Lock your plow electronically when detached. Only your control or backup code can unlock it—protection that's smart, simple, and secure.

Isolation Module

Plug-and-play electrical system that shifts your lights to the plow automatically. Keeps vehicle systems safe and installs clean with sealed OEM-grade connectors.

(D) STORM GUARD™ Powder Coat*

A finish built for years of hard winters. Epoxy-primed and powder-coated—this is the best protection against rust and wear in the industry.

Universal Control Options

Choose between a hand-held or dash-mounted control—both intuitive, backlit, and built to handle long hours and tough jobs. Features include soft-stop, float mode, and anti-theft lock.

Pre-Punched Blades

Accessory-ready blades come pre-punched, saving install time and protecting your finish. Just bolt on and go—no drilling required.



(A)



(C)



V-P



OWS





V-PLOWS

THE FLYING V THAT NEVER FLOCKS SOUTH.

BEST SUITED FOR:

Operators who need flexibility clearing tight driveways, wide lots, and everything in between. V-plows' adaptive designs keep you moving efficiently and powerfully, no matter the conditions.

VEHICLE COMPATIBILITY:

Varies across models, ranging from half-ton pickups to class 7 work trucks (under 11,793 kg GVWR).

WHAT THIS MEANS FOR YOU:

With the press of a button, FISHER V-plows adapt to your needs—switching effortlessly between multiple modes for endless scenarios. This collection is all about meeting the moment, and keeping you efficient from one job to the next. Because winter doesn't wait for mediocrity.

SIGNATURE FEATURES



▣ MULTIPLE BLADE MODES

Switch between straight, V, and scoop to match the job. Whether you're pushing, stacking, or windrowing—you'll be doing it better than the rest.



▣ TRIP-EDGE DESIGN

Independent trip-edges on each wing protect your equipment and keep snow moving forward—no springs to adjust or replace.



▣ INSTALOCK CYLINDERS

Double-acting cylinders lock wings for straight-blade mode and hold tight during back dragging.



▣ CENTER SNOW CONTROL

A center deflector and formed cutting edges reduce spillover and trailing for cleaner passes in all positions.



XV2™ HEAVY-DUTY

Fisher Engineering's largest, most rugged V-plow built for high-volume commercial jobs and municipal use.

BLADE SIZES:	10'6" (3.20 m)
BLADE CONSTRUCTION:	11-ga powder-coated steel or 12-ga stainless steel
STRUCTURAL REINFORCEMENT:	4 vertical ribs & 8 X-bracing ribs
LIFT & ANGLE RAM DIAMETER:	1.75" 2" (4.45 cm 5.08 cm)
VEHICLE COMPATIBILITY:	Class 2-7 (under 2,500 lbs GVWR)



XV2™

Commercial-grade V-plow that blends power and versatility for contractors with heavier-duty pickups.

BLADE SIZES:	8'6", 9'6" (2.59 m, 2.90 m)
BLADE CONSTRUCTION:	14-ga powder-coated steel or 14-ga stainless steel
STRUCTURAL REINFORCEMENT:	4 vertical ribs & 8 X-bracing ribs
LIFT & ANGLE RAM DIAMETER:	1.75" 1.75" (4.45 cm 4.45 cm)
VEHICLE COMPATIBILITY:	Class 2-6



XtremeV™

Durable, lightweight v-plow with an aggressive attack angle and large build, ready to take on storms of every size.

BLADE SIZES:	8'6", 9'6" (2.59 m, 2.90 m)
BLADE CONSTRUCTION:	14-ga powder-coated steel or stainless steel
STRUCTURAL REINFORCEMENT:	4 vertical ribs & 8 X-bracing ribs
LIFT & ANGLE RAM DIAMETER:	1.5" 1.75" (3.81 cm 4.45 cm)
VEHICLE COMPATIBILITY:	Class 2–3



EZ-V®

The ideal V-plow for half-ton trucks, balancing performance, weight, and maneuverability for residential and light-duty commercial work.

BLADE SIZES:	7'6" (2.29 m)
BLADE CONSTRUCTION:	14-ga powder-coated steel or high-strength, low-alloy stainless steel
STRUCTURAL REINFORCEMENT:	6 vertical ribs (powder-coated) ; 6 vertical & 2 horizontal ribs (stainless)
LIFT & ANGLE RAM DIAMETER:	1.25" 1.5" (3.18 cm 3.81 cm)
VEHICLE COMPATIBILITY:	Half-ton

WIN



PLOWS





WING PLOWS

WINGING IT NEVER FELT SO RELIABLE.

BEST SUITED FOR:

Operators looking to maximize coverage and minimize cleanup. Great for pros and intermediates alike who need to tackle it all—from tight corners, to full lots, to long driveways.

VEHICLE COMPATIBILITY:

Varies across models, ranging from class 2-6 trucks.

WHAT THIS MEANS FOR YOU:

When winter comes knocking, FISHER wing plows deliver efficiency and versatility above the rest. Two models lead the charge: the XLS™ blade offering advanced control with independently adjustable wings for a customizable plowing experience; and the all-new XRS™ automatic wing plow adjusting wings based on the chosen blade angle, making it user-friendly for any operator.

SIGNATURE FEATURES



■ MULTIPLE BLADE MODES

Switch seamlessly between straight, scoop, and windrow configurations to match changing site conditions, minimize spill-off, and handle everything from tight corners to open lots.



■ EXPANDABLE BLADE WIDTH

Wing plows extend beyond their base blade width to increase surface coverage, allowing you to move more snow with fewer passes—ideal when hitting wider lots and longer pushes.



■ TRIP-EDGE DESIGN

Independent trip-edges on each wing protect your equipment and keep snow moving forward—no springs to adjust or replace.



■ HEAVY-DUTY CONSTRUCTION

Designed for commercial use with high-strength steel moldboards, reinforced wings, and durable hydraulic systems that hold up under extreme winter conditions.



XLS™ WING PLOW

The XLS™ blade is a heavy-duty, high-efficiency plow with independent wing control, designed for advanced operators who need flexibility and top performance in any conditions. It boasts ten heavy-duty ribs and a torque tube for added strength, with wings that extend for extra coverage in both straight and scoop modes.

BLADE SIZES: 8' (2.44 m) (extends to 10' / 3.05 m in straight and 8'10" / 2.69 m in scoop);
8'6" (2.59 m) (extends to 11' / 3.35 m in straight and 9'10" / 3.00 m in scoop)

WING ACTIVATION: Independent Wing Control

STRUCTURAL REINFORCEMENT: 10 ribs & heavy-duty torque tube

LIFT & ANGLE RAM DIAMETER: 1.75" | 1.5" (4.45 cm | 3.81 cm)

VEHICLE COMPATIBILITY: 8' – Class 2–5 | 8'6" – Class 2–6



XRS™ WING PLOW

The XRS™ blade is a heavy-duty, high-efficiency plow with automatic wing control and ease of use across different skill levels. Its innovative system automatically adjusts the wings based on blade angle, bringing more efficiency for less effort. Trusted on skid steers for years, the XRS snowplow is truck-ready, at last.

BLADE SIZES:	8'7" (2.60 m) (extends to 9'8" / 2.90 m with wings pinned and 8'7" / 2.60 m in scoop)
WING ACTIVATION:	Automatic Wing Control
STRUCTURAL REINFORCEMENT:	Eight (8) ribs & heavy-duty torque tube
LIFT & ANGLE RAM DIAMETER:	1.75" 1.5" (4.45 cm 3.81 cm)
VEHICLE COMPATIBILITY:	Class 2-5

STRAIGHT BLADE



PLOWS





STRAIGHT BLADE PLOWS

STRAIGHT TO THE JOB. STRAIGHT TO THE POINT.

BEST SUITED FOR:

Operators who prefer simplicity and reliability. Straight blades are well-suited for smaller lots, driveways, and general-purpose plowing where straightforward performance and ease of use are key.

VEHICLE COMPATIBILITY:

Varies across models, ranging from class 2-7 trucks.

WHAT THIS MEANS FOR YOU:

Push straight through the biggest, boldest tasks with the legacy lineup of FISHER straight blades. Designed for reliability and ease of use, these plows feature simple hydraulics that let you lift, lower, and angle the blade no matter where the job takes you.

SIGNATURE FEATURES



■ HYDRAULIC BLADE POSITIONING

Effortlessly control lift, drop, and angle with in-cab controls.



■ ATTACHMENT SYSTEMS

Quick on/off mounting keeps your truck ready when you need it and clear when you don't.



■ TRIP-EDGE DESIGN

Independent trip-edges on each wing protect your equipment and keep snow moving forward—no springs to adjust or replace.



■ TRADITIONAL STRUCTURE

Built to work through every job with less moving parts and more focus on pure power—an ongoing ode to where FISHER began in 1948.



HC

A high-capacity straight blade engineered for deep snow and long pushes in large commercial applications. Built with a tall moldboard and strong ribs for maximum durability.

BLADE SIZES:	9' (2.74 m), 10' (3.05 m)
BLADE CONSTRUCTION:	11-ga powder-coated steel
STRUCTURAL REINFORCEMENT:	Eight (8) Heavy-duty vertical ribs, gussets, and pins
LIFT & ANGLE RAM DIAMETER:	1.75" 2" (4.45 cm x 5.08 cm)
VEHICLE COMPATIBILITY:	Classes 4-7 (under 26,000 GVWR)



HDX™

A stainless steel straight blade with a flexible attack angle, designed to conform to uneven terrain and reduce wear. Perfect for municipal and commercial jobs needing versatility and power.

BLADE SIZES:	8' (2.44 m), 9' (2.74 m)
BLADE CONSTRUCTION:	14-ga stainless steel
STRUCTURAL REINFORCEMENT:	Eight (8) vertical ribs
LIFT & ANGLE RAM DIAMETER:	1.5" 1.5" (3.81 cm 3.81 cm)
VEHICLE COMPATIBILITY:	8' – Classes 2 & 3 9' – Classes 2-5



HD2™

A heavy-duty straight blade with steel construction and reinforced ribs, made for serious plowing on tough surfaces. Best for professionals working in commercial lots and high-snow regions.

BLADE SIZES:	7'6" (2.29 m), 8' (2.44 m), 8'6" (2.59 m), 9' (2.74 m)
BLADE CONSTRUCTION:	12-ga powder-coated steel
STRUCTURAL REINFORCEMENT:	10 vertical ribs
LIFT & ANGLE RAM DIAMETER:	1.5" 1.5" (3.81 cm 3.81 cm)
VEHICLE COMPATIBILITY:	Classes 2 & 3



SD SERIES

A straight blade tailored for lighter-duty trucks and residential use, combining rugged steel design with a compact footprint. Great for first-time contractors or home-based snow removal.

BLADE SIZES:	6'9" (2.06 m), 7'6" (2.29 m)
BLADE CONSTRUCTION:	14-ga powder-coated steel
STRUCTURAL REINFORCEMENT:	Eight (8) vertical ribs and a torsion tube
LIFT & ANGLE RAM DIAMETER:	1.5" 1.5" (3.81 cm / 3.81 cm)
VEHICLE COMPATIBILITY:	Classes 2 & 3



HT SERIES

A straight blade made for half-ton trucks, offering a lightweight, easy-to-handle option without compromising strength. Ideal for homeowners and light commercial users seeking reliable performance.

BLADE SIZES:	7'6" (2.29 m)
BLADE CONSTRUCTION:	14-ga powder-coated steel
STRUCTURAL REINFORCEMENT:	Six (6) vertical ribs and a full-length horizontal tube
LIFT & ANGLE RAM DIAMETER:	2" 1.5" (5.08 cm / 3.81 cm)
VEHICLE COMPATIBILITY:	Half-Ton, Class 1



HS

A compact, lightweight straight blade made for smaller trucks and SUVs, ideal for residential and tight-space plowing. Offers durable performance with minimal vehicle strain.

BLADE SIZES:	6'8" (2.03 m), 7'2" (2.18 m)
BLADE CONSTRUCTION:	16-ga powder-coated steel high-strength, low-alloy steel
STRUCTURAL REINFORCEMENT:	Six (6) vertical ribs and a full-length horizontal tube
LIFT & ANGLE RAM DIAMETER:	1.5" 1" (3.81 cm / 2.54 cm)
VEHICLE COMPATIBILITY:	Mid-Size Pickups, Jeeps

FROM DUSK TO DAWN,

INTENSIFIRE™ LED HEADLIGHTS

Designed for superior visibility, offering long-lasting performance (~50,000 hours) and energy efficiency. Ideal for those who prioritize high performance, these LEDs are built to handle tough conditions and maximize safety during night plowing.

EdgeView™ TECHNOLOGY

Provides a wide, 180-degree bright beam for superior visibility in low-light conditions.

ENERGY EFFICIENT

Energy-efficient and long-lasting, reducing the need for frequent replacements.

DURABLY DEPENDABLE

Flat, ultra-white beam reduces glare and lights up what's ahead with precision.

SMART HEATING

Built-in sensors activate heat only when needed to keep lenses clear in snow and ice.

INTENSIFIRE™ DUAL-HALOGEN HEADLIGHTS

Halogen headlamps are a cost-effective option that deliver reliable lighting (~1,500 hours) for everyday plowing needs. This is the standard, trusted lighting kit that's shown the way for endless operators over the years.

PRICED RIGHT

Lower initial cost, for those not ready to go all-in on LEDs.

RELIABLE IN COLD

Trusted for years by FISHER Nation, providing warm light in cold temperatures.

REPLACEABLE ANYTIME

Despite not lasting as long as LEDs, halogen bulbs are easy to replace whenever needed.

LET THE LIGHTS BURN BRIGHT.



STAY IN CONTROL.



NO MATTER THE JOB.

FISHER controls are built to keep you focused, efficient, and in command—no matter what plow you're running. With a consistent control layout across

most models, there's no learning curve when your fleet or workload expands. That means less downtime and more confidence on the job.



PLOW ACCESSORIES

Let the details do the heavy lifting.

Back Drag Edges

Made from 1/4" abrasion-resistant steel and custom fit to your blade, back drag edges improve plowing results, providing a clean scrape while back dragging.

Commercial Blade Guide Kits

Commercial blade guides are highly visible fluorescent orange, enhanced with reflective tape, featuring the FISHER® logo, and available in 24" or 36" lengths.

(A) Steel Deflector

Extend the height of your blade and help keep snow off the windshield without affecting your ability to stack snow.

(B) FISHER Factory Original Paint

Genuine Factory-Tough paint in black, silver, and FISHER yellow provides durable coverage and is mixed to match your original equipment. Available in spray cans, quarts or gallons.

(C) Plow Parka

Heavy-duty, FISHER branded, nylon cover protects electrical and hydraulic systems from sun fade, oxidation and corrosion.

EZ Flow Hydraulic Fluid

FISHER EZ Flow high-performance hydraulic fluid is specifically formulated to provide better viscosity at temperatures for optimal performance in severe conditions. Available in 1-quart, 1-gallon, and 55-gallon sizes.

(D) Wing Extensions

Expand the carrying capacity of your XtremeV™ HD2™, HDX™.

Blade Angle Stop

Designed to transfer extreme impacts throughout the blade's structure and reduce stress on the hydraulic rams.

Curb Guards

Constructed of abrasion-resistant material and designed to fit tight to the blade, our curb guards allow you to plow along curbs without damaging your blade. Kits vary by plow model.

Emergency Parts Kit – Minute Mount® 2

Be prepared! This emergency parts kit is designed specifically for the NEW FLEET FLEX system snowplows. All kits contain high-volume FISHER Genuine Factory-Tough service parts needed for most emergency repairs.

FREEZE GUARD™ Grease

Available in 14 oz., 7 lb., 120 lb, and 400 lb sizes, FISHER FREEZE GUARD Grease defends and protects plow and spreader bearings, pivot points and moving components from wear and corrosion, even in extreme cold.

Heavy-Duty Lift Ram

Improve your blade's lifting force with this larger-diameter ram.

Cutting Edges

Increase wear resistance and restore your worn base angle to the proper geometry. Steel, rubber, poly, and carbide options available depending on plow model.

SnoFoil® Steel and Poly Deflectors

The curved, rigid design of the SnoFoil deflector provides excellent snow-rolling performance, ensuring you have visibility while plowing and reduces snow accumulation on the windshield.

Shoe Kits

Designed to increase the durability and life span of cutting edges and base angles by raising the blade for use on gravel and uneven surfaces. Extreme heavy-duty shoe kits available for specific models.




(A)



(C)



(B)

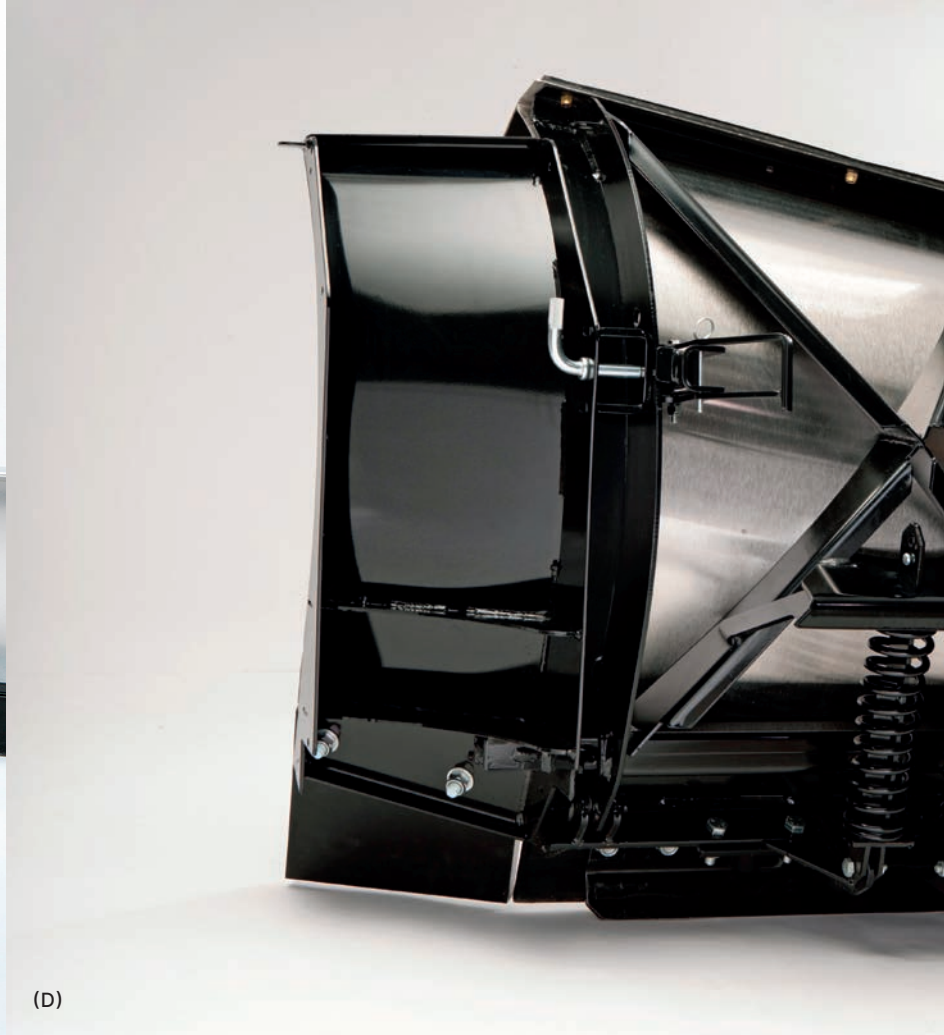

(D)

PLOW ACCESSORIES SPECS

V-PLOWS	XV2™			XtremeV™		EZ-V®
	10'6" (3.20 m)	9'6" (2.74 m)	8'6" (2.44 m)	9'6" (2.74 m)	8'6" (2.43 m)	7'6" (2.13 m)
3/8" STEEL CUTTING EDGE:			STD		STD	STD
1/2" STEEL CUTTING EDGE:	STD	STD	■	STD	■	■
5/8" STEEL CUTTING EDGE:	■	■	■			
3/4" CARBIDE CUTTING EDGE:	■	■	■	■	■	
1" POLY MOLDBOARD CUTTING EDGE:	■	■	■	■	■	■
RUBBER DEFLECTOR:	■	■	■	■	■	■
GRILLE PLATE -11- OR 14-PIN KIT:	■	■	■	■	■	■
CUP HOLDER CONTROL MOUNT:	■	■	■	■	■	■
PLOW PARKA:	■	■	■	■	■	■
SHOE KIT:*	■	■	■	■	■	■
EXTREME WEAR SHOE KIT:	■	■	■	■	■	■
CURB GUARD KIT:	STD	■	■	■	■	■
CURB GUARD-CAST IRON:		■	■	■	■	■
BLADE ANGLE STOP:	STD	■	■	■	■	STD
WING EXTENSIONS:		■	■	■	■	
BACK DRAG EDGE KIT:*	■	■	■	■	■	■
1 3/4" HEAVY-DUTY LIFT RAM:				■	■	
COMMERCIAL BLADE GUIDE KIT:	■	■	■	■	■	■
BALLAST RETAINER KIT:	■	■	■	■	■	■
EMERGENCY PARTS KIT:	■	■	■	■	■	■
FASTENER CONTROL MOUNTING KIT:	■	■	■	■	■	■
SECURITY KIT, LED HEADLIGHTS:	■	■	■	■	■	■

(STD) Included standard with plow

■ Available as an optional accessory

* Shoe Kits cannot be used simultaneously with Back Drag Edges

** Curb Guards cannot be used simultaneously with Wing Extension Kits

WINGED PLOWS	XLS™		XRS™	STD
	10'6" (3.20 m)	8'6" (2.43 m)	8'7" (2.59 m)	
3/8" STEEL CUTTING EDGE:		■		
1/2" STEEL CUTTING EDGE:	STD	STD	STD	
5/8" STEEL CUTTING EDGE:	■	■		
3/4" CARBIDE CUTTING EDGE:				
1" POLY MOLDBOARD CUTTING EDGE:	■	■	■	
RUBBER DEFLECTOR:	■	■	■	
GRILLE PLATE -11- OR 14-PIN KIT:	■	■	■	
CUP HOLDER CONTROL MOUNT:	■	■	■	
PLOW PARKA:	■	■	■	
SHOE KIT:*				
EXTREME WEAR SHOE KIT:	■	■	■	
CURB GUARD KIT:				
CURB GUARD-CAST IRON:				
BLADE ANGLE STOP:				
WING EXTENSIONS:				
BACK DRAG EDGE KIT:*	■	■		
1 3/4" HEAVY-DUTY LIFT RAM:				
COMMERCIAL BLADE GUIDE KIT:	■	■	■	
BALLAST RETAINER KIT:	■	■	■	
EMERGENCY PARTS KIT:	■	■	■	
FASTENER CONTROL MOUNTING KIT:	■	■	■	
SECURITY KIT, LED HEADLIGHTS:	■	■	■	

PLOW ACCESSORIES SPECS

STRAIGHT BLADE PLOWS	HC		HDX™		HD2™	
	10' (3.05 m)	9' (2.74 m)	9' (2.74 m)	8' (2.44 m)	9' (2.74 m)	8'6" (2.59 m)
¼" STEEL CUTTING EDGE:						
⅜" STEEL CUTTING EDGE:					■	■
½" STEEL CUTTING EDGE:	STD	STD	STD	STD	STD	STD
⅝" STEEL CUTTING EDGE:	■	■	■	■	■	■
¾" CARBIDE CUTTING EDGE:	■	■	■	■	■	■
1" POLY CUTTING EDGE:			■	■	■	■
1" RUBBER CUTTING EDGE:			■	■	■	■
POLY SnoFoil® DEFLECTOR:						
STEEL SnoFoil DEFLECTOR:	■	■	■	■	■	■
STEEL DEFLECTOR:			■	■	■	■
RUBBER DEFLECTOR:	■	■	■	■	■	■
GRILLE PLATE : 11 OR 14-PIN KIT:	■	■	■	■	■	■
CUP HOLDER CONTROL MOUNT:	■	■	■	■	■	■
PLOW PARKA:	■	■	■	■	■	■
BLADE ANGLE STOP:	■	■				
SHOE KIT:	■	■	■	■	■	■
SHOE KIT - CAST IRON:	■	■			■	■
CURB GUARD KIT:	■	■	■	■	■	■
WING EXTENSIONS:			■	■	■	■
BACK DRAG EDGE KIT:			■	■	■	■
1 ¾" HEAVY-DUTY LIFT RAM:			■	■	■	■
COMMERCIAL BLADE GUIDE KIT:	■	■	■	■	■	■
BALLAST RETAINER KIT:	■	■	■	■	■	■
EMERGENCY PARTS KIT:	■	■	■	■	■	■
CHAIN KIT:						
FASTENER CONTROL MOUNTING KIT:	■	■	■	■	■	■
SECURITY KIT, LED HEADLIGHTS:	■	■	■	■	■	■


(STD) Included standard with plow

■ Available as an optional accessory

* Shoe Kits cannot be used simultaneously with Back Drag Edges

** Curb Guards cannot be used simultaneously with Wing Extension Kits

HD2™		SD SERIES		HT Series™	EZ-V®	
8' (2.44m)	7'6" (2.29 m)	7'6" (2.13 m)	6'9" (1.83 m)	7'6" (2.13 m)	7'2" (2.13 m)	6'8" (1.83 m)
					STD	STD
■	STD	■		■	■	■
STD	■			■		
■	■			■		
■	■					
■	■	STD	STD		■	■
■	■					
				■		
■	■					
■	■	■		■	■	■
■	■	■		■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■					
■	■	■	■	■	■	■
■	■					
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■					
■	■	■	■	■	■	■
■	■	■	■	■	■	■
■	■	■	■	■		
				■		
■	■	■	■	■	■	■
■	■	■	■	■	■	■

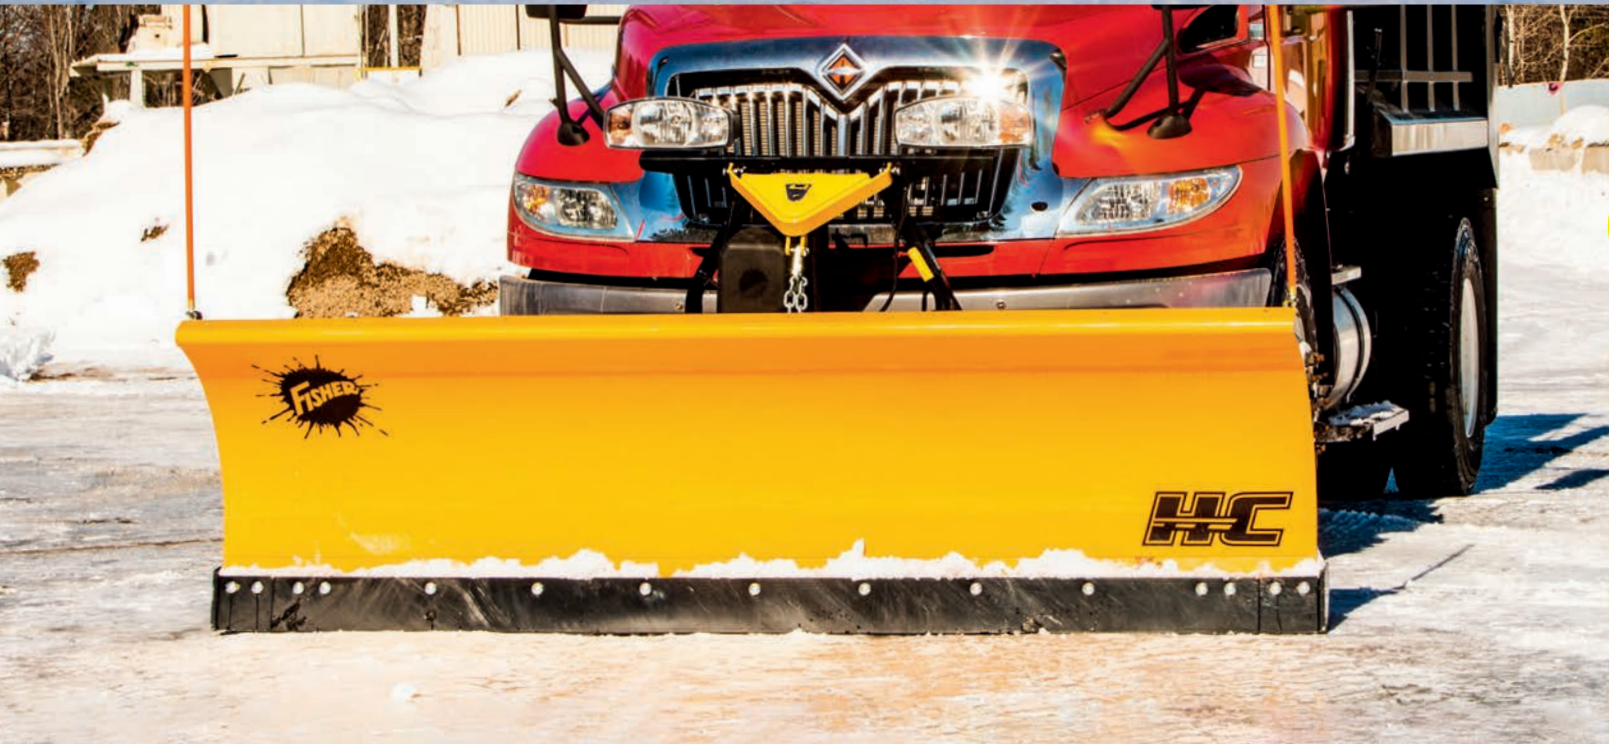

V-PLOW

Versatile, multi-position plows that cut through deep snow, stack higher, and adapt to changing conditions. Ideal for contractors who need to plow efficiently in tight or uneven areas.


WING PLOW

Maximize efficiency with plows that automatically expand and retract to match your job. Great for clearing large areas fast, with built-in flexibility for tight spots.

STRAIGHT BLADE PLOW

Reliable, no-nonsense performance for clearing open lots, driveways, and roads. Simple to operate and great for general-purpose snow removal.

Find the right fit for your vehicle
using our online eMatch Tool.



COMPREHENSIVE V-PLOW SPECS

XV2™	8'6" (2.59 m)	9'6" (2.90 m)	10'6" (3.20 m)
MOLDBOARD OPTIONS:	Steel/Stainless	Steel/Stainless	Steel/Stainless
BLADE WIDTH:	8'6" (2.59 m)	9'6" (2.90 m)	10'6" (3.20 m)
BLADE HEIGHT:	At Center: 31" (78.74 cm) At End: 38" (96.52 cm)	At Center: 31" (78.74 cm) At End: 39" (99.06 cm)	At Center: 35" (88.90 cm) At End: 45" (114.30 cm)
BLADE THICKNESS:	Steel: 14 ga Stainless: 14 ga	Steel: 14 ga Stainless: 14 ga	Steel: 11 ga Stainless: 12 ga
TRIP SPRINGS:	4	6	6
RIBS:	12	12	12
LIFT CYLINDER:	1.75" x 10" (4.45 cm x 25.40 cm)	1.75" x 10" (4.45 cm x 25.40 cm)	1.75" x 10" (4.45 cm x 25.40 cm)
ANGLING RAMS:	1.75" x 11" (4.45 cm x 27.94 cm)	1.75" x 11" (4.45 cm x 27.94 cm)	2" x 11" (5.08 cm x 27.94 cm)
PLOWING WIDTH (FULL ANGLE):	Full Angle: 7'5" (2.26 m) Scoop: 7'2" (2.18 m) Full V: 7'8" (2.34 m)	Full Angle: 8'6" (2.59 m) Scoop: 8'2" (2.49 m) Full V: 8'7" (2.62 m)	Full Angle: 9'9" (2.97 m) Scoop: 9'7" (2.92 m) Full V: 9'11" (3.02 m)
APPROXIMATE WEIGHT:*	972 lb (440 kg)	1,059 lb (480 kg)	1,322 lb (599 kg)
CUTTING EDGE:	0.375" x 6" (0.95 cm x 15.24 cm)	0.5" x 6" (1.27 cm x 15.24 cm)	0.5" x 6" (1.27 cm x 15.24 cm)
MOUNT TYPE:	Minute Mount® 2	Minute Mount 2	Minute Mount 2
XtremeV™	8'6" (2.59 m)	9'6" (2.90 m)	
MOLDBOARD OPTIONS:	Steel/Stainless	Steel/Stainless	
BLADE WIDTH:	8'6" (2.59 m)	9'6" (2.90 m)	
BLADE HEIGHT:	At Center: 29" (73.66 cm) At End: 31" (78.74 cm)	At Center: 31" (78.74 cm) At End: 33" (83.82 cm)	
BLADE THICKNESS:	14 ga	14 ga	
TRIP SPRINGS:	4	6	
RIBS:	12	12	
LIFT CYLINDER:	1.5" x 10" (3.81 cm x 25.40 cm)	1.5" x 10" (3.81 cm x 25.40 cm)	
ANGLING RAMS:	1.75" x 11" (4.45 cm x 27.94 cm)	1.75" x 11" (4.45 cm x 27.94 cm)	
PLOWING WIDTH (FULL ANGLE):	Full Angle: 7'5" (2.26 m) Scoop: 7'1" (2.16 m) Full V: 7'7" (2.31 m)	Full Angle: 8'3" (2.51 m) Scoop: 7'11" (2.41 m) Full V: 8'7" (2.62 m)	
APPROXIMATE WEIGHT:*	876 lb (397 kg)	984 lb (446 kg)	
CUTTING EDGE:	0.375" x 6" (0.95 cm x 15.24 cm)	0.5" x 6" (1.27 cm x 15.24 cm)	
MOUNT TYPE:	Minute Mount 2	Minute Mount 2	

Applies to XV2 and XtremeV:

**Plus vehicle mount: approx. 60 lb (27.22 kg)*

Applies to EZ-V:

**Weight of the vehicle mount not included*

EZ-V®	7'6" (2.29 m)	7'6" (2.29 m)
MOLDBOARD OPTIONS:	Stainless	Powder-Coated Steel
BLADE WIDTH:	7'6" (2.29 m)	7'6" (2.29 m)
BLADE HEIGHT:	At Center: 27" (68.58 cm) At End: 33" (83.82 cm)	At Center: 27" (68.58 cm) At End: 33" (83.82 cm)
BLADE THICKNESS:	14 ga	14 ga
TRIP SPRINGS:	2	2
RIBS:	6 Vertical 2 Horizontal	6 Vertical
LIFT CYLINDER:	1.25" x 8.63" (3.18 cm x 21.92 cm)	1.25" x 8.63" (3.18 cm x 21.92 cm)
ANGLING RAMS:	1.5" x 12" (3.81 cm x 30.48 cm)	1.5" x 12" (3.81 cm x 30.48 cm)
PLOWING WIDTH (FULL ANGLE):	Full Angle: 6'7" (2.01 m) Scoop: 6'5" (1.96 m) Full V: 6'9" (2.06 m)	Full Angle: 6'7" (2.01 m) Scoop: 6'5" (1.96 m) Full V: 6'9" (2.06 m)
APPROXIMATE WEIGHT:*	550 (249 kg)	510 lb (231 kg)
CUTTING EDGE:	0.375" x 6" (0.95 cm x 15.24 cm)	0.375" x 6" (0.95 cm x 15.24 cm)
MOUNT TYPE:	Minute Mount® 2	Minute Mount 2



COMPREHENSIVE WING PLOW SPECS

XLS™	8' (2.44 m) - 10' (3.01 m)	8'6" (2.59 m) - 11' (3.35 m)
MOLDBOARD OPTIONS:	Steel/Stainless	Steel/Stainless
BLADE WIDTH:	Retracted: 8' (2.44 m) Expanded: 10' (3.05 m) Scoop: 8'10" (2.69 m)	Retracted: 8'6" (2.59 m) Expanded: 11' (3.35 m) Scoop: 9'10" (3.00 m)
BLADE HEIGHT:	At Center: 31" (78.74 cm) At End: 35" (88.9 cm)	At Center: 31" (78.74 cm) At End: 36" (91.44 cm)
BLADE THICKNESS:	14 ga	14 ga
TRIP SPRINGS:	4	4
RIBS:	10	10
LIFT CYLINDER:	1.75" x 10" (4.45 cm x 25.40 cm)	1.75" x 10" (4.45 cm x 25.40 cm)
ANGLING RAMS:	1.5" x 10" (3.81 cm x 25.40 cm)	1.5" x 10" (3.81 cm x 25.40 cm)
PLOWING WIDTH (FULL ANGLE):	Retracted: 7'2" (2.18 m) Expanded: 9' (2.74 m) Scoop: 7'11" (2.41 m)	Retracted: 7'11" (2.41 m) Expanded: 10'6" (3.20 m) Scoop: 9'6" (2.90 m)
APPROXIMATE WEIGHT:*	1,078 lb (488 kg)	1,140 lb (516 kg)
BLADE CUTTING EDGE:	0.5" x 6" Steel (1.27 cm x 15.24 cm)	0.5" x 6" Steel (1.27 cm x 15.24 cm)
WING CUTTING EDGE:	1.5" x 9" Polyurethane (3.81 cm x 22.86 cm)	1.5" x 9" Poly (3.81 cm x 22.86 cm)
MOUNT TYPE:	Minute Mount® 2	Minute Mount 2



Applies to XLS:
*Plus vehicle mount: approx. 60 lb (27.22 kg)
Snowplows with serial numbers beginning
with 180210 and higher.
Applies to XRS:
*Weight of the vehicle mount not included

XRS™	8'7" (2.59 m) - 9'8" (2.95 m)
MOLDBOARD OPTIONS:	Powder-Coated Steel
BLADE WIDTH:	8'7" (2.6 m) Scoop 9'8" (2.9 m) Wings Pinned
BLADE HEIGHT:	29.5" (75 cm)
BLADE THICKNESS:	12 ga
TRIP SPRINGS:	4
RIBS:	6 blade 2 wings
LIFT CYLINDER:	1.75" x 10" (4.45 cm x 25.40 cm)
ANGLING RAMS:	1.5" x 10" (3.81 cm x 15.24 cm)
PLOWING WIDTH (FULL ANGLE):	7'10" (2.4 m)
APPROXIMATE WEIGHT:*	950 lb (430.91 kg)
BLADE CUTTING EDGE:	0.5" x 6" (1.27 cm x 15.24 cm)
WING CUTTING EDGE:	1.25" x 8.25" Poly (3.18 cm x 20.96 cm)
MOUNT TYPE:	Minute Mount® 2



COMPREHENSIVE STRAIGHT BLADE PLOW SPECS

HC	9' (2.74 m)	10' (3.05 m)
MOLDBOARD OPTIONS:	Steel	Steel
BLADE WIDTH:	9' (2.74 m)	10' (3.05 m)
BLADE HEIGHT:	34" (86.36 cm)	34" (86.36 cm)
BLADE THICKNESS:	11 ga	11 ga
TRIP SPRINGS:	6	6
RIBS:	8	8
LIFT CYLINDER:	1.75" x 10" (4.45 cm x 25.40 cm)	1.75" x 10" (4.45 cm x 25.40 cm)
ANGLING RAMS:	2" x 12.5" (5.08 cm x 31.75 cm)	2" x 12.5" (5.08 cm x 31.75 cm)
PLOWING WIDTH (FULL ANGLE):	7'11" (2.41 m)	8'10" (2.67 m)
APPROXIMATE WEIGHT:*	1,178 lb (534 kg)	1,312 lb (594 kg)
CUTTING EDGE:	0.5" x 6" (1.27 cm x 15.24 cm)	0.5" x 6" (1.27 cm x 15.24 cm)
MOUNT TYPE:	Minute Mount® 2	Minute Mount 2
HDX™	8' (2.44 m)	9' (2.74 m)
MOLDBOARD OPTIONS:	Stainless	Stainless
BLADE WIDTH:	8' (2.44 m)	9' (2.74 m)
BLADE HEIGHT:	29" (73.66 cm) †	29" (73.66 cm) †
BLADE THICKNESS:	14 ga	14 ga
TRIP SPRINGS:	4	4
RIBS:	8	8
LIFT CYLINDER:	1.5" x 10" (3.81 cm x 25.40 cm)	1.5" x 10" (3.81 cm x 25.40 cm)
ANGLING RAMS:	1.5" x 12" (3.81 cm x 30.48 cm)	1.5" x 12" (3.81 cm x 30.48 cm)
PLOWING WIDTH (FULL ANGLE):	7'2" (2.19 m)	8'1" (2.46 m)
APPROXIMATE WEIGHT:*	861 lb (390 kg)	902 lb (409 kg)
CUTTING EDGE:	0.5" x 6" Steel (1.27 cm x 15.24 cm)	0.5" x 6" Steel (1.27 cm x 15.24 cm)
MOUNT TYPE:	Minute Mount 2	Minute Mount 2

Applies to HC and HDX:

**Plus vehicle mount: approx. 184 lb (83.46 kg) on HC model; 60 lb (27.22 kg) on HDX model*

Applies to HDX:

†HDX blade height shown is for the 55° attack angle. The 65° attack-angle blade height is 28.5" and the 75° attack-angle blade height is 27".

Applies to HD2:

***Plus vehicle mount: approx. 60 lb (27.22 kg)*

HD2™	7'6" (2.29 m)	8' (2.44 m)
MOLDBOARD OPTIONS:	Steel	Steel
BLADE WIDTH:	7'6" (2.29 m)	8' (2.44 m)
BLADE HEIGHT:	29" (73.66 cm)	29" (73.66 cm)
BLADE THICKNESS:	12 ga	12 ga
TRIP SPRINGS:	3	4
RIBS:	10	10
LIFT CYLINDER:	1.5" x 10" (3.81 cm x 25.40 cm)	1.5" x 10" (3.81 cm x 25.40 cm)
ANGLING RAMS:	1.5" x 12" (3.81 cm x 30.48 cm)	1.5" x 12" (3.81 cm x 30.48 cm)
PLOWING WIDTH (FULL ANGLE):	6'9" (2.05 m)	7'2" (2.19 m)
APPROXIMATE WEIGHT:**	709 lb (321 kg)	752 lb (341 kg)
CUTTING EDGE:	0.375" x 6" (0.95 cm x 15.24 cm)	0.5" x 6" (1.27 cm x 15.24 cm)
MOUNT TYPE:	Minute Mount® 2	Minute Mount 2
HD2™	8'6" (2.59 m)	9' (2.74 m)
MOLDBOARD OPTIONS:	Steel	Steel
BLADE WIDTH:	8'6" (2.59 m)	9' (2.74 m)
BLADE HEIGHT:	29" (73.66 cm)	29" (73.66 cm)
BLADE THICKNESS:	12 ga	12 ga
TRIP SPRINGS:	4	4
RIBS:	10	10
LIFT CYLINDER:	1.5" x 10" (3.81 cm x 25.40 cm)	1.5" x 10" (3.81 cm x 25.40 cm)
ANGLING RAMS:	1.5" x 12" (3.81 cm x 30.48 cm)	1.5" x 12" (3.81 cm x 30.48 cm)
PLOWING WIDTH (FULL ANGLE):	7'7" (2.32 m)	8'1" (2.46 m)
APPROXIMATE WEIGHT:**	769 lb (348 kg)	789 lb (357 kg)
CUTTING EDGE:	0.5" x 6" (1.27 cm x 15.24 cm)	0.5" x 6" (1.27 cm x 15.24 cm)
MOUNT TYPE:	Minute Mount 2	Minute Mount 2

COMPREHENSIVE STRAIGHT BLADE PLOW SPECS

SD SERIES		6'9" (2.06 m)	7'6" (2.29 m)
MOLDBOARD OPTIONS:	Steel	Steel	
BLADE WIDTH:	6'9" (2.06 m)	7'6" (2.29 m)	
BLADE HEIGHT:	26" (66.04 cm)	26" (66.04 cm)	
BLADE THICKNESS:	14 ga	14 ga	
TRIP SPRINGS:	2	2	
RIBS:	8	8	
LIFT CYLINDER:	1.5" x 6" (3.81 cm x 15.24 cm)	1.5" x 6" (3.81 cm x 15.24 cm)	
ANGLING RAMS:	1.5" x 10" (3.81 cm x 25.40 cm)	1.5" x 10" (3.81 cm x 25.40 cm)	
PLOWING WIDTH (FULL ANGLE):	6'1" (1.85 m)	6'9" (2.06 m)	
APPROXIMATE WEIGHT:*	501 lb (227 kg)	517 lb (234 kg)	
CUTTING EDGE:	1" x 6" Poly (2.54 cm x 15.24 cm)	1" x 6" Poly (2.54 cm x 15.24 cm)	
MOUNT TYPE:	Minute Mount® 2	Minute Mount 2	
HT Series™		7'6" (2.29 m)	
MOLDBOARD OPTIONS:	Steel		
BLADE WIDTH:	7'6" (2.29 m)		
BLADE HEIGHT:	27" (68.58 cm)		
BLADE THICKNESS:	14 ga		
TRIP SPRINGS:	2		
RIBS:	6 + Tube		
LIFT CYLINDER:	2" x 6.75" (5.08 cm x 17.14 cm)		
ANGLING RAMS:	1.5" x 8" (3.81 cm x 20.32 cm)		
PLOWING WIDTH (FULL ANGLE):	6'7" (2.01 m)		
APPROXIMATE WEIGHT:*	417 lb (189 kg)		
CUTTING EDGE:	Full Length Base Angle included with Blade		
MOUNT TYPE:	Minute Mount 2		

Applies to SD Series and HT Series

**Plus vehicle mount: approx. 60 lb (27.22 kg)*

Applies to HS

***Not including vehicle mount*

HS	6'8" (2.03 m)	7'2" (2.18 m)
MOLDBOARD OPTIONS:	Steel	Steel
BLADE WIDTH:	6'8" (2.03 m)	7'2" (2.18 m)
BLADE HEIGHT:	23.5" (59.69 cm)	23.5" (59.69 cm)
BLADE THICKNESS:	16 ga	16 ga
TRIP SPRINGS:	2	2
RIBS:	6	6
LIFT CYLINDER:	1.5" x 6" (3.81 cm x 15.24 cm)	1.5" x 6" (3.81 cm x 15.24 cm)
ANGLING RAMS:	1" x 7" (2.54 cm x 17.78 cm)	1" x 7" (2.54 cm x 17.78 cm)
PLOWING WIDTH (FULL ANGLE):	5'11" (1.80 m)	6'4" (1.90 m)
APPROXIMATE WEIGHT:**	260 lb (118 kg)	267 lb (121 kg)
CUTTING EDGE:	0.25" x 5" (0.64 cm x 12.70 cm)	0.25" x 5" (0.64 cm x 12.70 cm)
MOUNT TYPE:	Minute Mount® 2	Minute Mount 2



FISHER STORIES:

THE MAN BEHIND THE MOUNTS.



For the past 30 years, Andre LeBlond has grown the FISHER® legacy through his masterful engineering work—with a focus on our trusted mount systems. His name sits on the US Patent of the Minute Mount® 2. His team is responsible for every mount across FISHER Nation. And his story is endlessly inspiring.

Scan to watch





BORN IN THE USA.


SNOW + ICE IN OUR DNA

In 1948, a man named Dean Fisher started a snowplow company. The name was simple: His. And the destination was busy: Boston. So after a trip to see the in-laws in Maine, the plan changed.

Fisher chose a small coastal town called Rockland. In his words: "What better place to build snowplows than in snow country?" He began in a small garage by the water, and designed over 50 snowplows that first winter. Parts were chained to the pier—testing corrosion in the cold, salty ocean. That set the relentless bar for every winter to come. Over 75 years later, snowplows from Fisher Engineering are

frozen into culture as the leader of snow and ice removal. Our success grew us out of the garage, but we've always kept that day-one spirit. Still building, testing, and proving right here in Rockland.



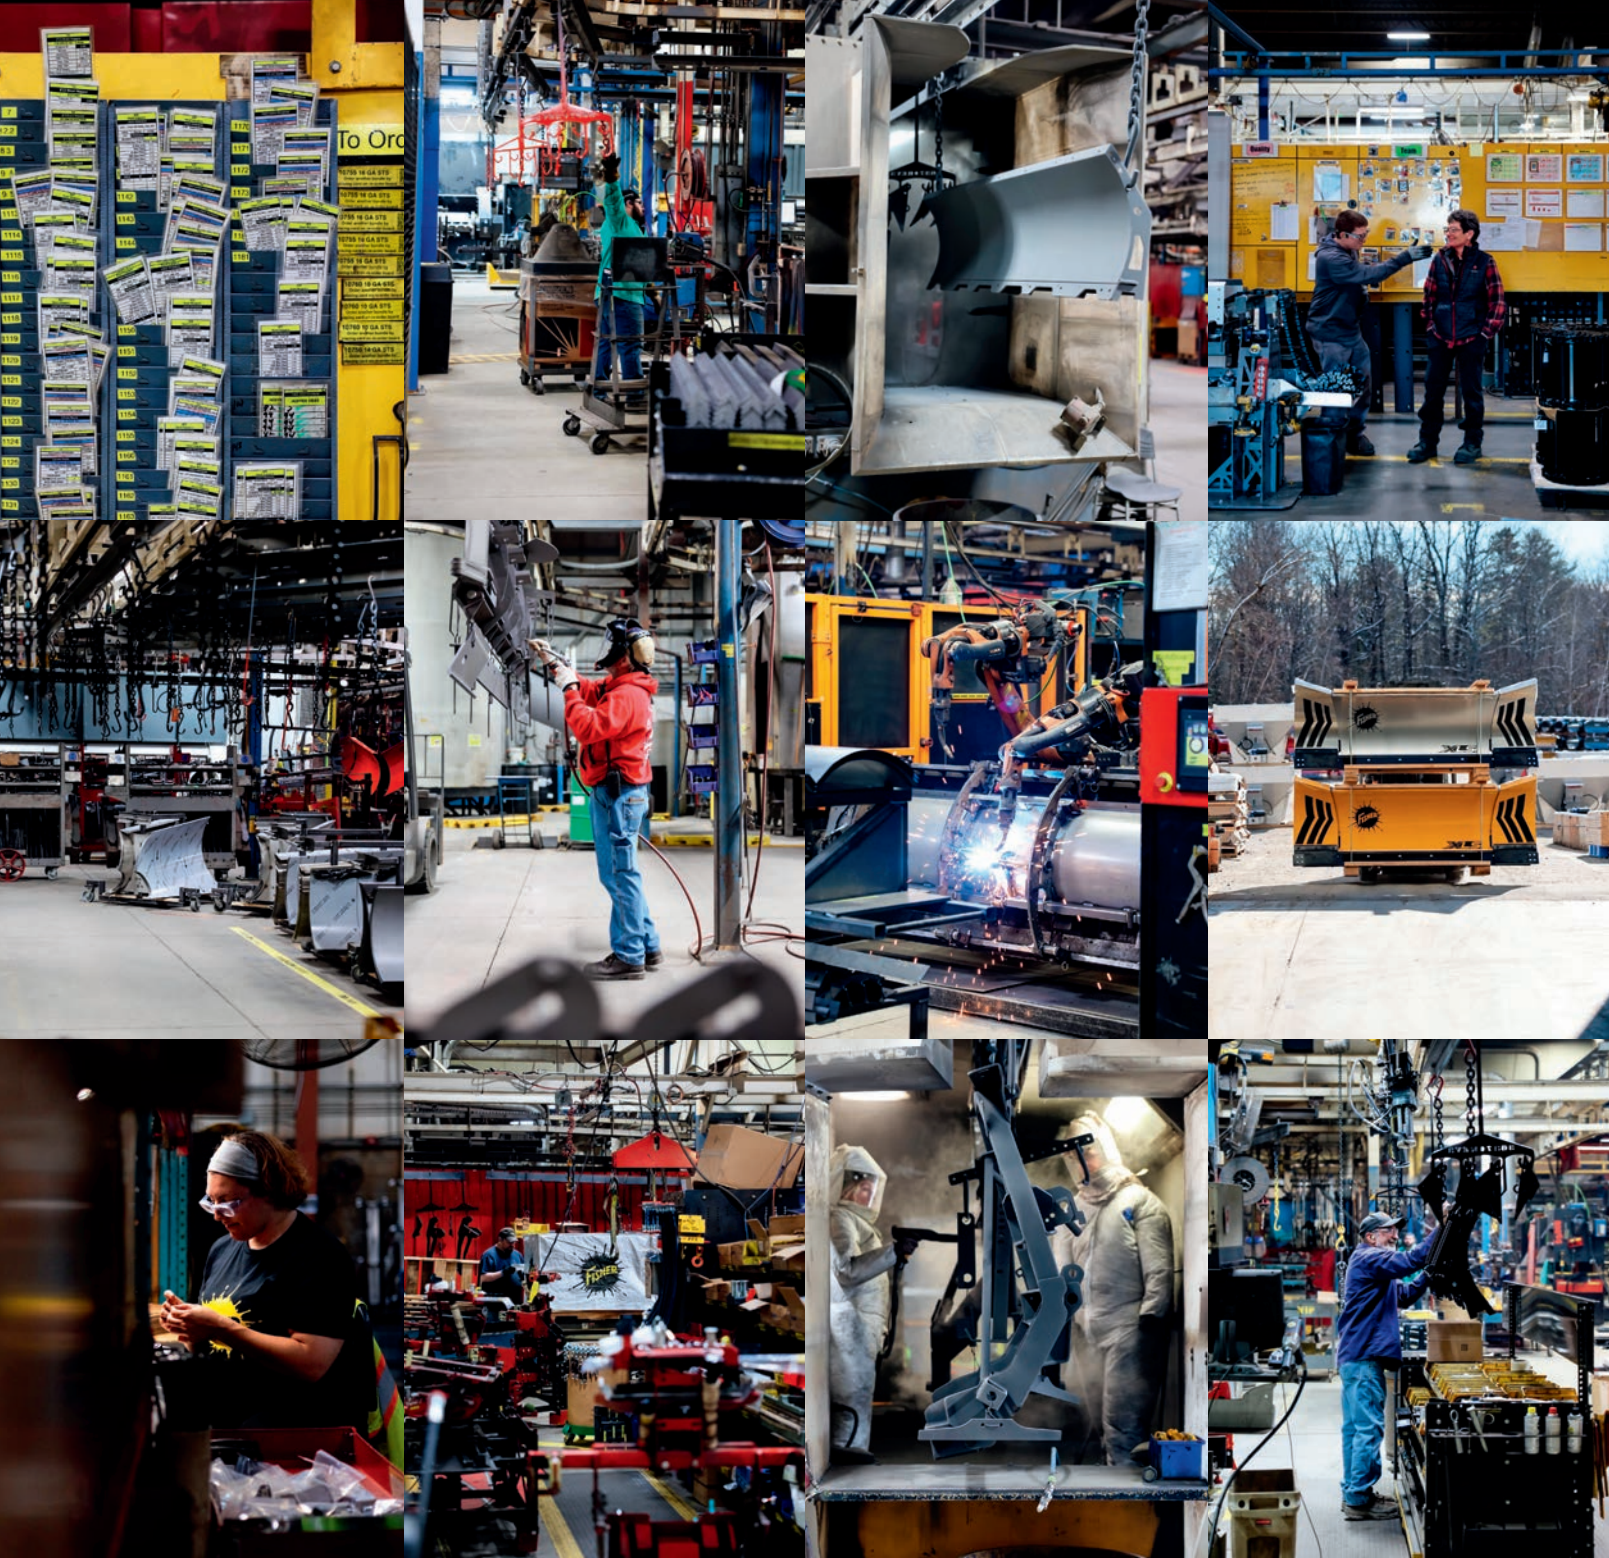

**"THE BEST PRODUCT WE
KNOW HOW TO MAKE.
THE BEST SERVICE WE
KNOW HOW TO GIVE."**

-Dean Fisher

FISHER ENGINEERING | 50 Gordon Drive | Rockland, Maine 04841

Fisher Engineering reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. Fisher Engineering or the vehicle manufacturer may require or recommend optional equipment for snow removal. Do not exceed vehicle ratings with a snowplow. This product is manufactured under the following US patents 7,681,334; 7,797,859; 9,200,418; 9,296,571; 9,822,563; 10,793,056; 11,680,379; 12,188,190; CAN patent 2,843,990; 2,900,491; and other patents pending. Fisher Engineering offers a limited warranty for all equipment and accessories. See separately printed page for this important information. The following are registered (®) or unregistered (™) trademarks of Douglas Dynamics, LLC: EdgeView™, EZ-V®, FISHER®, FREEZE GUARD™, HD2™, HDX™, HT Series™, INTENSIFIRE, Minute Mount® 2, SECURITY GUARD™, SnoFoil®, STORM GUARD™, TEMPEST™, XLS™, XRS™, XtremeV™.

FISHERPLOWS.COM

© 2026 Douglas Dynamics, LLC
All rights reserved.



SEE YOU IN THE STORM